




芯位排布

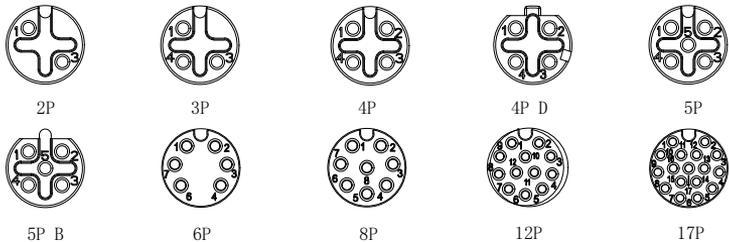


A: 焊杯高度

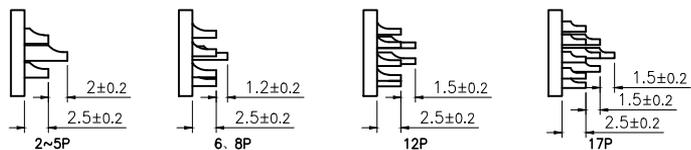

面板开孔尺寸

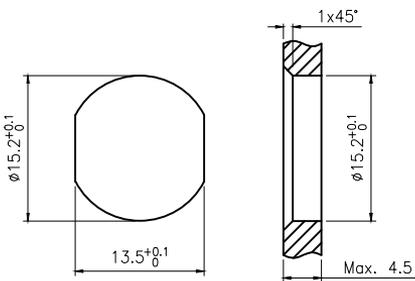

芯数	2	3	4	4D	5	5B	6	8	12	17
额定电流/电压	4A/250V	4A/250V	4A/250V	4A/250V	4A/60V	4A/60V	2A/30V	2A/30V	1.5A/30V	1.5A/30V
额定脉冲电压	2500V	2500V	2500V	2500V	1500V	1500V	800V	800V	800V	800V
绝缘电阻 (MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100
接触电阻 (mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5

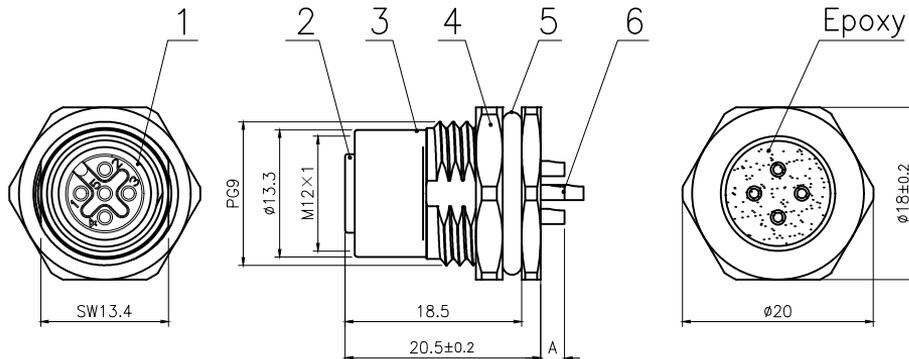

6	焊线式母针直针镀金	pc	2~17
5	氟橡胶 φ16*φ12*2绿色	pc	1
4	六角螺母黄铜 φ20*φ18-2.8 PG9螺纹 (M12座子螺母) 亮镍	pc	1
3	M12螺线式板前,母座锌合金外壳 锁板牙PG9	pc	1
2	M12孔型胶芯长体带倒角 黑色	pc	1
1	氟橡胶 φ9*φ6*1.5绿色	pc	1
No.	Specification	Unit	Q'ty

GENERAL TOLERANCE (UNLESS SPECIFIED)	≤10	±0.1
	<10~≤20	±0.2
	<20~≤50	±0.5
Angle	±1°	
THIRD ANGLE		
	UNIT	MM
SIZE	A4	
DWN	W.M	DATE
CHK		DATE
APVD		DATE
REV	A	
SHEET	1 OF 1	

	TITLE	M12 板后安装孔型金属插座 焊线式 锁板牙PG9 锌合金外壳
	PART NO	
	DRAWING NO	M12-Sx-GWFP9-ZA