




芯位排布

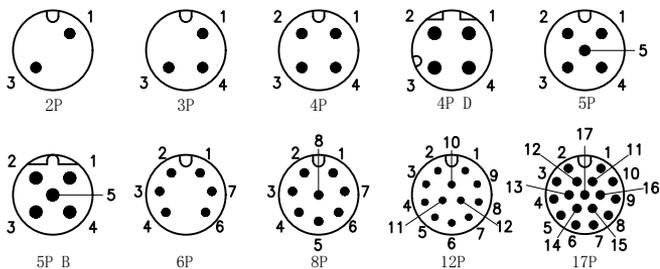

A: 焊杯高度

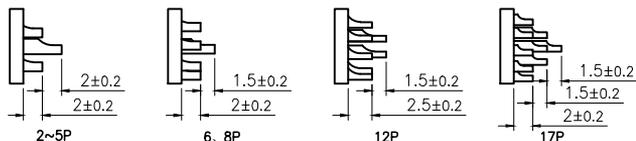


面板开孔尺寸

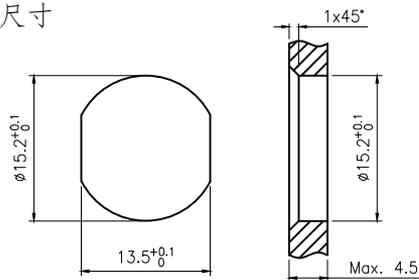

技术参数

芯数	2	3	4	4D	5	5B	6	8	12	17
额定电流/电压	4A/250V	4A/250V	4A/250V	4A/250V	4A/60V	4A/60V	2A/30V	2A/30V	1.5A/30V	1.5A/30V
额定脉冲电压	2500V	2500V	2500V	2500V	1500V	1500V	800V	800V	800V	800V
绝缘电阻 (MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100
接触电阻 (mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5

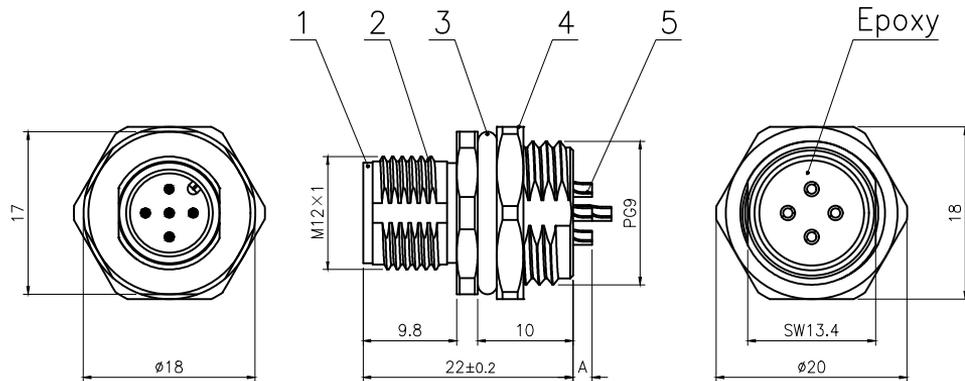

No.	Specification	Unit	Q'ty
5	焊线式公针直针镀金	pc	2~17
4	六角螺母黄铜 φ20*φ18-2.8 PG9 螺纹 (M12 座子螺母) 亮镍	pc	1
3	氟橡胶 φ16*φ12*2 绿色	pc	1
2	M12 螺纹式板前, 公座锌合金外壳 锁板牙 PG9	pc	1
1	M12 针型胶芯长体 黑色	pc	1

GENERAL TOLERANCE (UNLESS SPECIFIED)

≤10	±0.1
<10~≤20	±0.2
<20~≤50	±0.5
Angle	±1°



THIRD ANGLE

DWN	DATE
W.M	2023.8.14
CHK	DATE
APVD	DATE
UNIT	REV
MM	A
SIZE	SHEET
A4	1 OF 1

CAZN 正成

TITLE M12 板前安装针型金属插座
焊线式 锁板牙 PG9 锌合金外壳

PART NO

DRAWING NO

M12-Px-GWBP9-ZA