
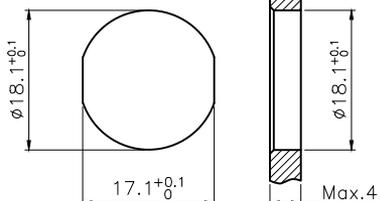






技术参数

芯数	2	3	4	5	5A	6	7	7A	8	12	14	14A	19	24
额定电流/电压	7A/250V	7A/250V	6A/250V	6A/250V	6A/250V	5A/250V	5A/125V	5A/125V	5A/60V	3A/60V	3A/60V	3A/60V	3A/60V	1A/60V
额定脉冲电压	1500V	1500V	1500V	1500V	1500V	1500V	800V	800V	800V	500V	500V	500V	500V	500V
绝缘电阻 (MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100
接触电阻 (mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤3	≤3	≤3	≤3	≤3

芯位排布

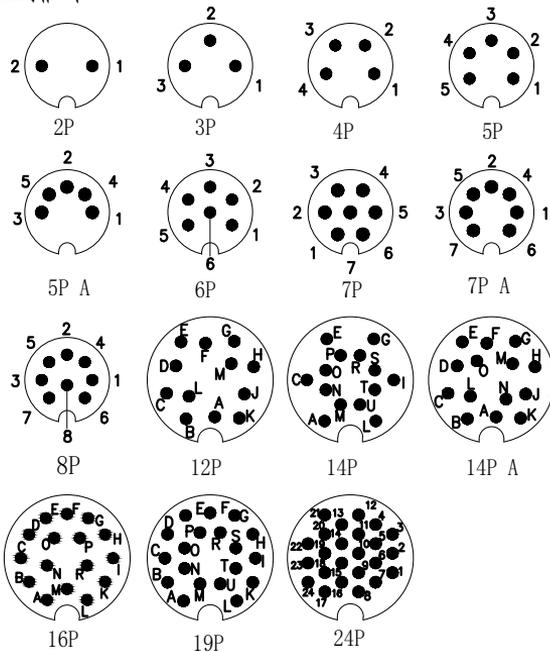

面板开孔尺寸

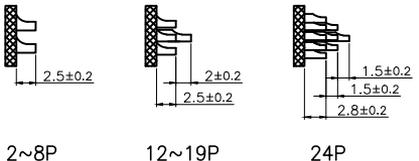

A: 针脚高度

5	M16 焊线式公针	黄铜	镀金	pc	2~24
4	M16 圆形螺母 M18×0.75	黄铜	镀镍	pc	1
3	M16 法兰座外壳专用O型圈 φ17×φ14×1.5	橡胶	/	pc	1
2	M16 板前安装插座公头外壳	黄铜	镀镍	pc	1
1	M16 常规公胶芯	尼龙	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty

GENERAL TOLERANCE (UNLESS SPECIFIED)	DWN	DATE	
	W.M	2022.10.8	
	CHK	DATE	
≤10 ±0.1	APVD	DATE	TITLE
<10~≤20 ±0.2			M16 板前安装针型插座
<20~≤50 ±0.5	UNIT	REV	PART NO
Angle ±1°	MM	A	
	SIZE	SHEET	DRAWING NO
THIRD ANGLE	A4	1 OF 1	M16-B-Px