


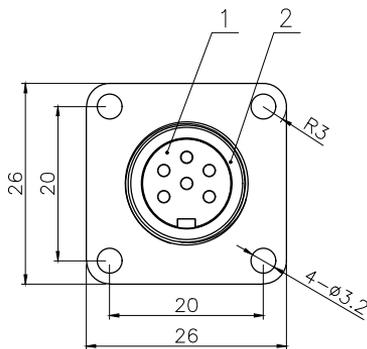



技术参数

芯数	2	3	4	5	5A	6	7	7A	8	12	14	14A	19	24
额定电流/电压	7A/250V	7A/250V	6A/250V	6A/250V	6A/250V	5A/250V	5A/125V	5A/125V	5A/60V	3A/60V	3A/60V	3A/60V	3A/60V	1A/60V
额定脉冲电压	1500V	1500V	1500V	1500V	1500V	1500V	800V	800V	800V	500V	500V	500V	500V	500V
绝缘电阻(MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100
接触电阻(mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤3	≤3	≤3	≤3	≤3


芯位排布

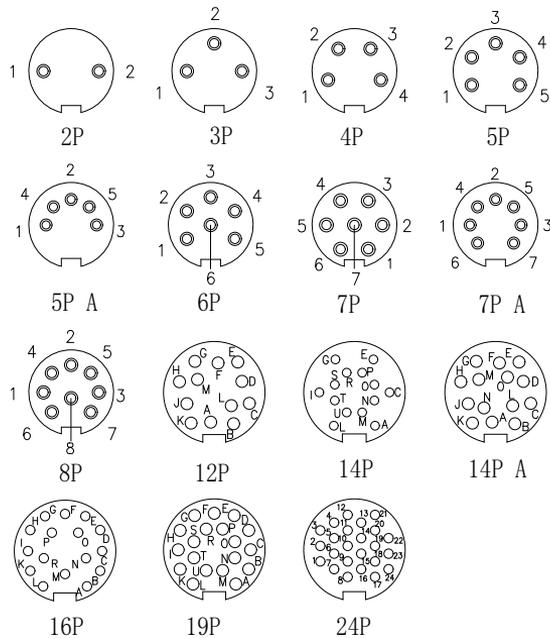

2~8P



12~19P



24P

A: 针脚高度

5	M16 焊线式母针	磷铜	镀金	pc	2~24
4	M16 方形法兰母座外壳	黄铜	镀镍	pc	1
3	M16 方形法兰硅胶垫片	硅胶	/	pc	1
2	M16 母头胶芯防水垫片 $\phi 14.7 \times \phi 11 - 1.5$	橡胶	/	pc	1
1	M16 常规母胶芯	尼龙	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty

GENERAL TOLERANCE (UNLESS SPECIFIED)	DWN	DATE
	W.M	2022.10.8
	CHK	DATE
≤10 ±0.1 <10~≤20 ±0.2 <20~≤50 ±0.5 Angle ±1°	APVD	DATE
	UNIT	REV
THIRD ANGLE	MM	A
	SIZE	SHEET
	A4	1 OF 1



TITLE: M16 孔型方型插座

PART NO

DRAWING NO: M16-H-Sx