
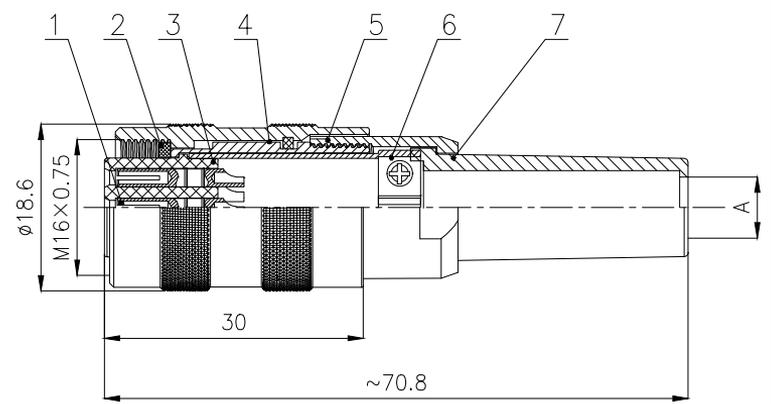



No.	Specification	Unit	Q'ty
1	焊线式公针直针镀金	pc	2~24
2	M16尾管式母头防水垫片, 硅橡胶 $\phi 14.5 * \phi 11-1.5$ 黑色	pc	1
3	M16 针型胶芯组装式 黑色	pc	1
4	M16 尾管孔型插头组合套件 (包含母头连接套、母头内插外壳、卡簧)	pc	1
5	M16 螺纹式, 组装式尾管螺帽塑胶外壳	pc	1
6	M16 管式胶芯外壳组合套件, (包含胶芯外壳、压线板、压线板螺丝)	pc	1
7	M16 尾管式尾管, (包含压紧圈、护线套、尾管)	pc	1

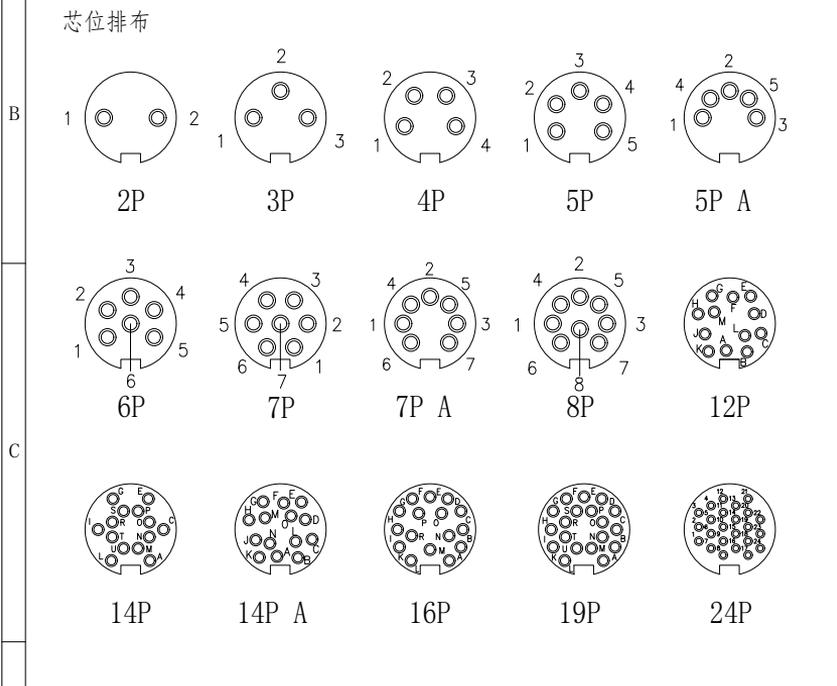


A 出线口尺寸:
 $\phi 5.0$ (5.0~6.5mm)
 $\phi 6.5$ (6.5~8.0mm)

芯数	2	3	4	5	5A	6	7	7A	8	12	14	14A	16	19	24
额定电压	250V	250V	250V	250V	250V	250V	125V	125V	60V						
额定电流	7A	7A	6A	6A	6A	5A	5A	5A	5A	3A	3A	3A	3A	3A	1A
额定冲击电压	1500	1500	1500	1500	500	1500	800	500	500	500	500	500	500	500	500
绝缘等级	III	III	III	III	III	III	III	III							
接触电阻 (m Ω)	5	5	5	5	5	5	5	5	5	3	3	3	3	3	3

GENERAL TOLERANCE (UNLESS SPECIFIED)	DWN	DATE
≤ 10 ± 0.1	W.M	2024.2.19
$< 10 \sim \leq 20$ ± 0.2	CHK	DATE
$< 20 \sim \leq 50$ ± 0.5	APVD	DATE
Angle $\pm 1'$	UNIT	REV
	MM	A
	SIZE	SHEET
	A4	1 OF 1

TITLE	PART NO
M16 直式孔型塑料组装插头 焊线式	
DRAWING NO	
M16-Sx-PWA6.5-PT	



THIRD ANGLE