


A:
M923 1.0 铆压式母针:
A120102-0273 适配线规: 32~22AWG; 0.03~0.34mm²
A120102-0362 适配线规: 22~16AWG; 0.34~1.5mm²

B:
M923 2.0 铆压式母针线规:
A120102-0274 适配线规: 22~14AWG; 0.35~2.5mm²
A120102-0361 适配线径: 14~12AWG; 2.5~4.0mm²

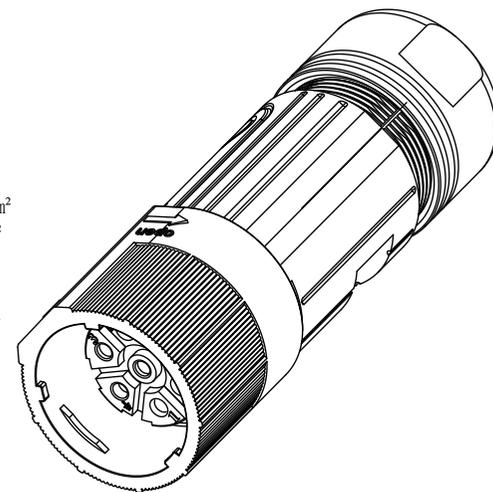

技术参数

材料

连接方式:	卡扣连接	外壳材料:	铜/合金
接线方式:	压接	接触体材料:	铜, 镀金
污染等级:	3	绝缘体材料:	增强尼龙
温度范围:	-40°C ~ +80°C	密封材料:	橡胶, 绿色
防护等级:	IP67		
电缆出口直径:	8.0~15mm		
插拔周期:	≥500		
额定电压:	630V/250V		
额定电流:	20A/9A		
接触电阻:	≤5 mΩ		
绝缘电阻:	3000 MΩ		

所有材料均符合RoHS要求

GENERAL TOLERANCE (UNLESS SPECIFIED)	绘图 DWN	C.Z.H 2025.6.12				
≤10 ±0.2	确认 CHK					品名 TITLE
<10~≤20 ±0.5	核准 APVD			品号 PART NO	C110108-00143	
<20~≤50 ±0.1	单位 UNIT	MM	版本 REV	A	型号 DRAWING NO	M923-S8-GCA15-PB
Angle ±1°	尺寸 SIZE	A4	页码 SHEET	1 OF 1		

