



A:
M923 1.0 铆压式公针线规:
A120101-0282 适配线规: 32~22 AWG; 0.03~0.34mm²
A120101-0364 适配线规: 22~16 AWG; 0.34~1.5mm²



B:
M923 2.0 铆压式公针线规:
A120101-0283 适配线规: 22~14 AWG; 0.35~2.5mm²
A120101-0363 适配线规: 14~12 AWG; 2.5~4.0mm²

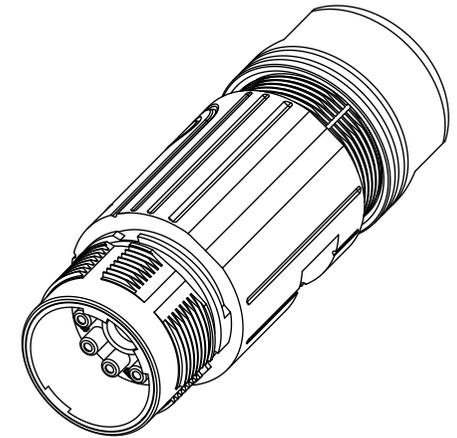

技术参数

材料

连接方式:	卡扣连接	外壳材料:	铜/合金
接线方式:	压接	接触体材料:	铜, 镀金
污染等级:	3	绝缘体材料:	增强尼龙
温度范围:	-40°C ~ +80°C	密封材料:	橡胶, 绿色
防护等级:	IP67		
电缆出口直径:	8.0~15mm		
插拔周期:	≥500		
额定电压:	630V/250V		
额定电流:	20A/9A		
接触电阻:	≤5 mΩ		
绝缘电阻:	3000 MΩ		

所有材料均符合RoHS要求

GENERAL TOLERANCE (UNLESS SPECIFIED)	绘图 DWN	C.Z.H 2025.6.12					
≤10 ±0.2	确认 CHK					品名 TITLE	M923直式外螺牙针型金属组装对接插头 8芯 铆压式 出线孔OD:15 卡扣式
<10~≤20 ±0.5	核准 APVD					品号 PART NO	C110108-00141
<20~≤50 ±0.1 Angle ±1°	单位 UNIT	MM	版本 REV	A	型号 DRAWING NO	M923-P8-GCK15	
 视角 THIRD ANGLE	尺寸 SIZE	A4	页码 SHEET	1 OF 1			