




芯位排布




3P




4P



4P D



5P B






6P




8P

芯数

芯数	3	4	4D	5B	6	8
额定电流/电压	3A/60V	3A/60V	4A/60V	3A/30V	1.5A/30V	1.5A/30V
额定脉冲电压	800V	800V	800V	800V	800V	800V
绝缘阻抗 (MΩ)	≥500	≥500	≥500	≥500	≥500	≥500
接触阻抗 (MΩ)	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5

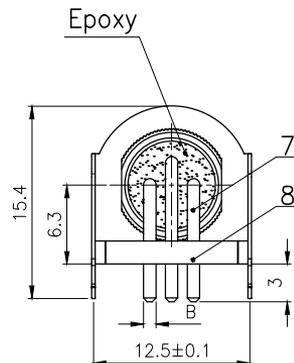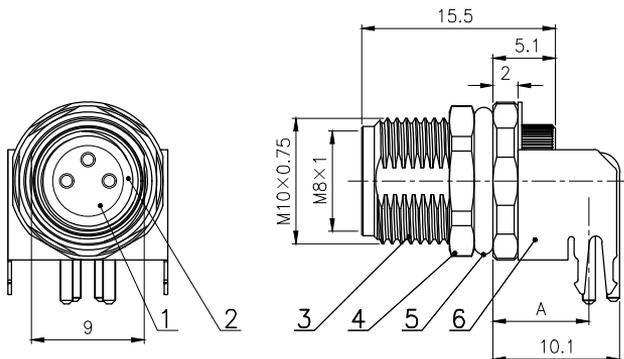


面板开孔尺寸



A:
2~5P: 7.68mm
6P: 6.48mm
8P: 6.15mm


B:
2~5P: $\phi 1\text{mm}$
6~8P: $\phi 0.6\text{mm}$

P.C.B开孔尺寸

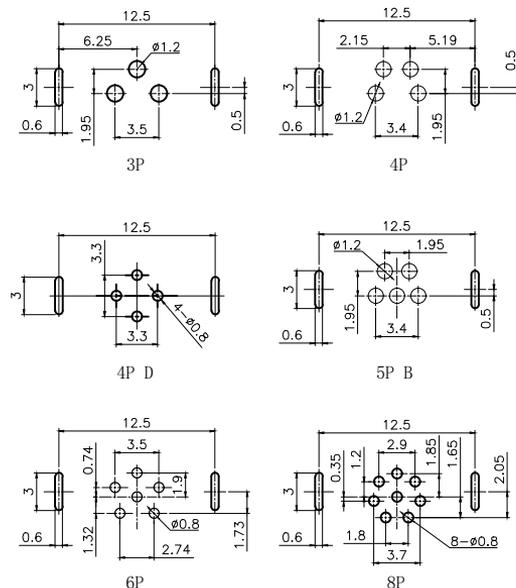

8	M8 弯式座子定位板	LCP	/	pc	1
7	M8 弯式母针	磷铜	镀金	pc	3~8
6	M8 90° 卡扣式屏蔽外壳	黄铜	镀镍	pc	1
5	M8弯型母座O型防水圈 $\phi 10 \times \phi 7 \times 1.5$	橡胶	/	pc	1
4	锁板六角螺母M10×0.75	黄铜	镀镍	pc	1
3	M8 弯型板后安装插座母头外壳	黄铜	镀镍	pc	1
2	M8 母头胶芯O型防水圈 $\phi 7 \times \phi 5.4 \times 0.8$	橡胶	/	pc	1
1	M8 常规母胶芯	尼龙	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty

GENERAL TOLERANCE
(UNLESS SPECIFIED)
≤10 ±0.1
<10~≤20 ±0.2
<20~≤50 ±0.5
Angle ±3°



THIRD ANGLE

DWN		TITLE
CHK		
APVD		PART NO
UNIT	REV	
MM	A	
SIZE	SHEET	DRAWING NO
A4	1 OF 1	

CAZN 正成

M8 弯针孔型插座

M8-L-Sx