


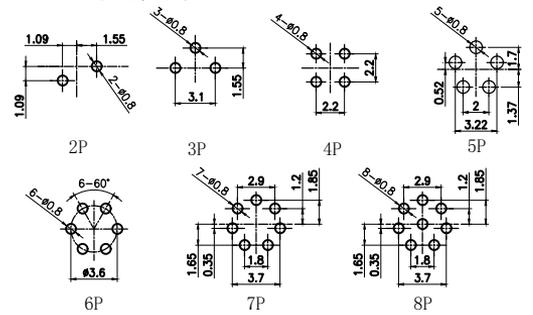


芯数	2	3	4	5	6	7	8
额定电流/电压	4A/125V	4A/125V	3A/125V	3A/125V	1A/125V	1A/125V	1A/125V
工作电压 (AC.V) 分钟	1500	1500	1500	1500	1500	1500	1500
耐电压 (AC.V) 分钟	II						
绝缘阻抗 (MΩ) DC500V	III						
接触阻抗 (MΩ) DC1A	≤3	≤3	≤3	≤3	≤3	≤3	≤3

P. C. B开孔尺寸

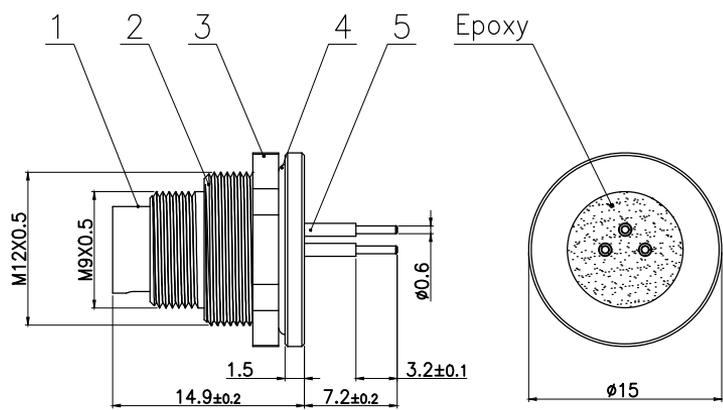

面板开孔尺寸

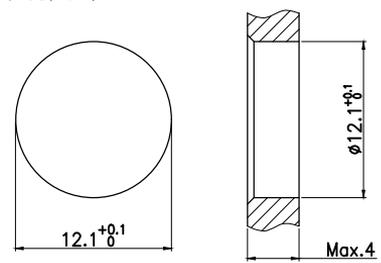

5	M9 焊板式公针	黄铜	镀金	pc	2~8
4	M9 插座防水O型圈 $\phi 13 \times \phi 11 \times 1$	橡胶	/	pc	1
3	锁板六角螺母 M12×0.5	黄铜	镀镍	pc	1
2	M9 板后安装插座公头外壳	黄铜	镀镍	pc	1
1	M9 常规公胶芯	尼龙	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty

GENERAL TOLERANCE (UNLESS SPECIFIED)	≤10	±0.1
	<10~≤20	±0.2
	<20~≤50	±0.5
	Angle	±1°
 THIRD ANGLE		
DWN	DATE	
W.M	2022.7.2	
CHK	DATE	
APVD	DATE	
UNIT	REV	
MM	A	
SIZE	SHEET	
A4	1 OF 1	

		TITLE	M9板后安装针型插座 PCB板式
		PART NO	
DRAWING NO		M9-F1-Px	